

GASOLINE LINE

GASOLINE PUMP

Gasoline powered motor pumps.

4" closed stainless steel impeller.

Maximum suction 26 feet.

Manual start, air cooling.


New impeller, saving power and consumption.

Hydraulic body in PPO + PA + 30 GRP (fiberglass).

Suitable for marine water use.

Engine with sensor for lack of oil.

Includes suction accessories.

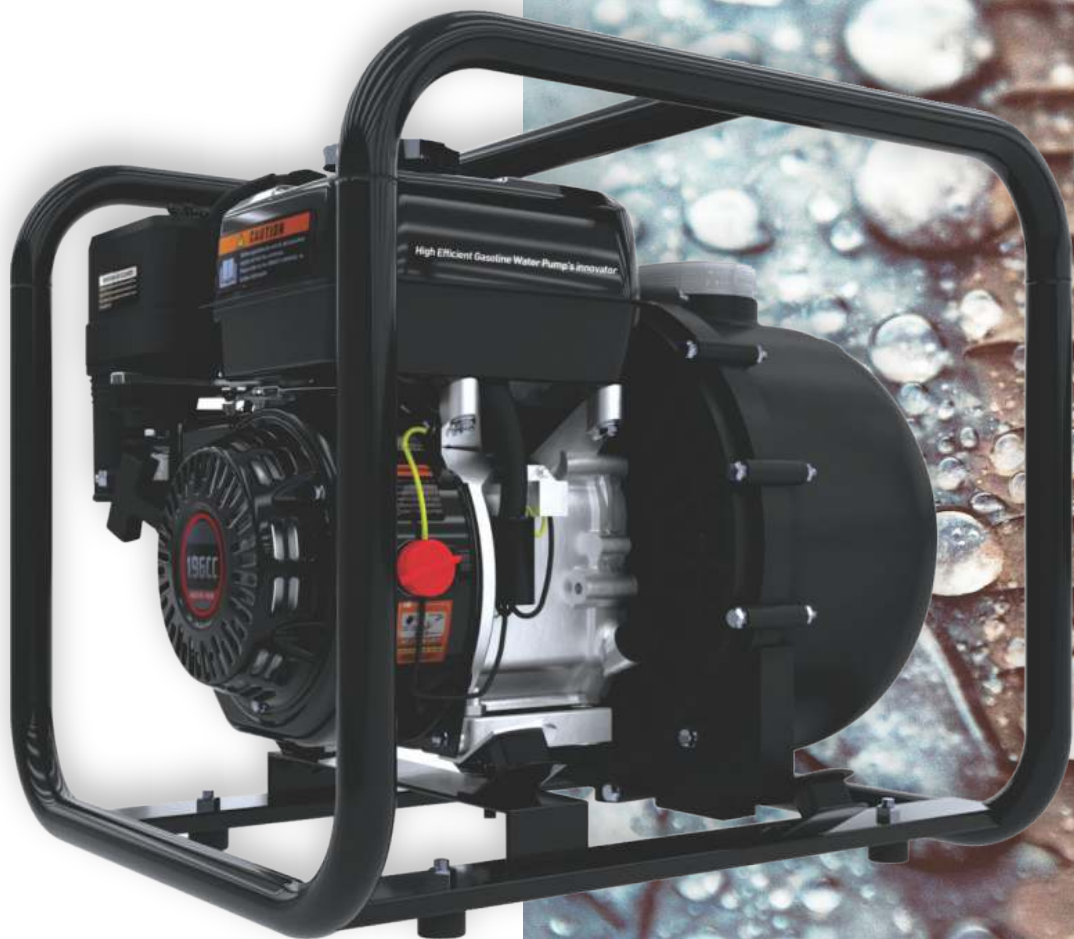

PERFORMANCE

GASOLINE LINE

GASOLINE PUMP

MODEL	Inlet	Kw	RPM	Gpm	0.0	26.0	44.0	66.0	88.0	105.6	114.4	132.0	140.8
WP32-36-20	2"	3.2	3600	H (ft)	118	105	100	90	79	66	59	33	3

MODEL	Inlet	Kw	RPM	Gpm	0.0	44.0	88.0	110.0	132.0	154.0	176.0	198.0	242.0
WP55-29-30	3"	3.2	3600	H (ft)	95	87	79	74	67	61	52	43	2




MODEL	Inlet	Kw	RPM	Gpm	0.0	44.0	88.0	132.0	176.0	220.0	264.0	308.0	352.0
WP80-26-40	4"	3.2	3600	H (ft)	85	79	74	72	66	56	46	33	2



PERFORMANCE

GASOLINE LINE

GASOLINE PUMP

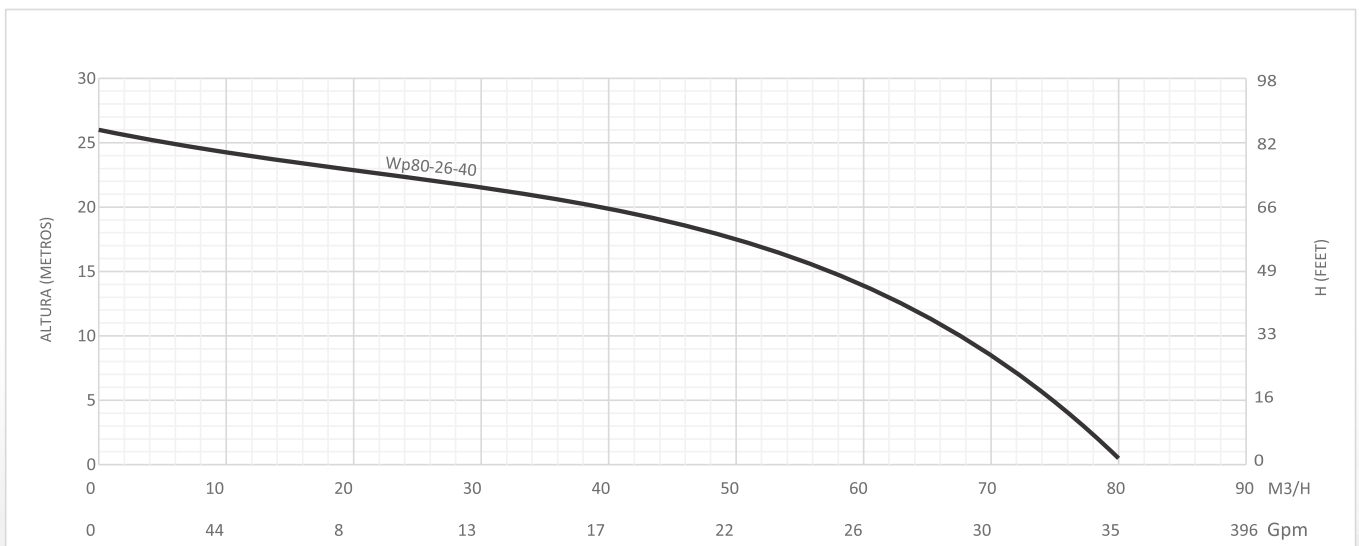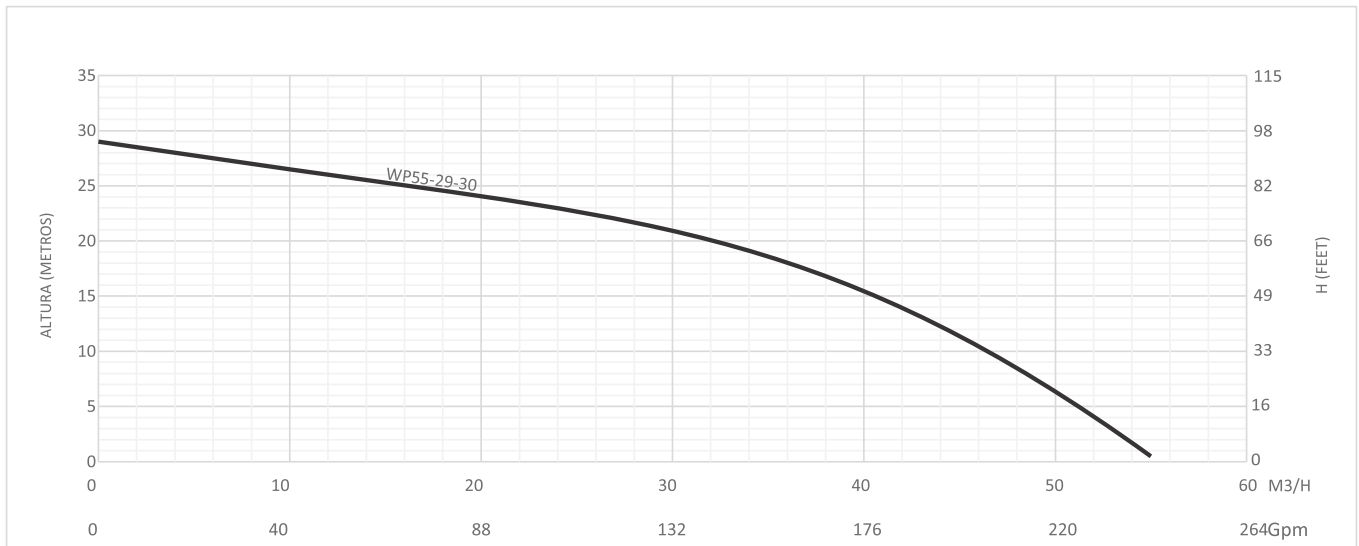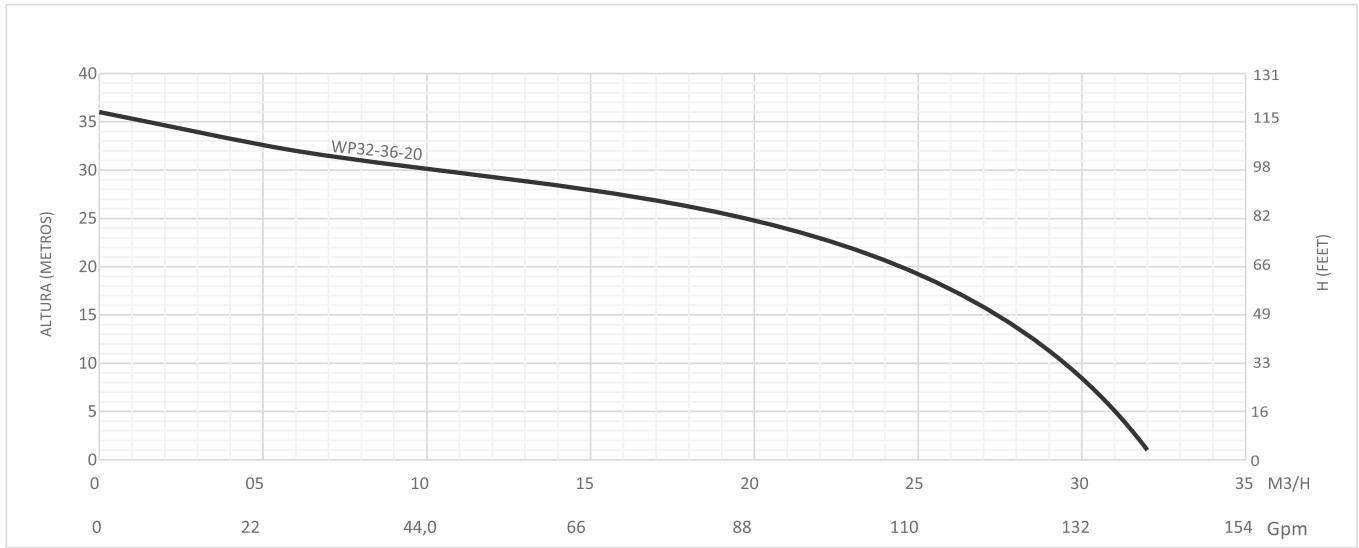

CHARACTERISTICS

GASOLINE LINE GASOLINE PUMP

	WP32-26-20	WPS5-29-30	WP80-26-40
Inlet	2"	3"	4"
Angular speed	3600 RPM	3600 RPM	3600 RPM
Q. máx. gpm	140,9 GPM	242,2 GPM	352,2 GPM
H. Max	118 Feet	95 Feet	85 Feet
Suction (feet)	26 Feet	26 Feet	26 Feet
Suction time	200 s	200 s	200 s
Engine model	168f163cc	168f163cc	170f-1 223cc
Max output power	2,6 Kw	3,2 Kw	4,5 Kw
Bore x stroke	2 1/2" x 1 3/4"	2 1/2" x 1 3/4"	2 3/4" x 2 1/4"
Displacement (cc)	0,04 G	0,04 G	0,06 G
Compression ratio	8,3:1	8,3:2	8,8:1
Maximum torque	12,SN.m	12,SN.m	12,SN.m
Refrigeration system	Fresh air	Fresh air	Fresh air
Ignition system	Contactless transistorized	Contactless transistorized	Contactless transistorized
Start System	Manual	Manual	Manual
Air filter	semi dry	semi dry	semi dry
Fuel tank capacity	0,9 G	0,9 G	0,9 G
Fuel consumption	0,32 G/h	0,42 G/h	0,54 G/h
Oil capacity	0,16 G	0,16 G	0,16G
Continuous work	180 min	180 min	180 min
Weight (lbs)	55 Lbs	57 Lbs	58 Lbs
Packaging dimensions	21"x 18" x 18"	21"x 18" x 18"	21"x 18" x 18"