

SP4 LINE

4" STAINLESS STEEL DEEP WELL

BODY

SS304 stainless steel casing.

SS304 stainless steel Impellers.

SS304 stainless steel Diffuser.

SS304 stainless steel shaft.

SS304 stainless steel inlet and outlet.

High resistance to rust.

Great hydraulic performance.

Built-in check valve.

MOTOR

Casing made of SS304 stainless steel.

Double axial bearing.

Copper winding.

Class F insulation.

Stainless Steel Ss304 oil chamber (1Hp to 3Hp).

Brass oil chamber (5.5Hp to 7Hp).

Available :

230v 1 Phase .

230v 3 Phases.

Built-in capacitor for 1 Phase.

SS304 stainless steel shaft.

SS304 stainless steel casing.



PERFORMANCE





SP4 LINE 4" STAINLESS STEEL DEEP WELL

MODEL	Outlet	Hp	Kw	Gpm	0.0	4.0	6.6	10.6	15.8	18.5	21.8	23.8	31.7
SP-0503	1 1/4"	0.5	0.5	H (ft)	92	79	79	75	72	69	66	62	39
SP-0504	1 1/4"	0.5	0.5	H (ft)	118	108	108	105	98	92	85	79	56
SP-0507	1 1/4"	1	0.75	H (ft)	210	190	187	180	171	164	154	138	98
SP-0509	1 1/4"	1.5	1	H (ft)	272	249	246	240	223	207	194	180	131
SP-0511	1 1/4"	2	1.5	H (ft)	328	302	295	285	272	259	236	223	167
SP-0515	1 1/4"	3	2	H (ft)	443	410	400	387	361	348	325	299	230
SP-0526	1 1/4"	5.5h	4	H (ft)	774	696	686	673	630	600	564	532	397
SP-0539	1 1/4"	7.5	5.5	H (ft)	1142	1079	1050	1001	951	912	860	807	600

MODEL	Outlet	Hp	Kw	Gpm	0.0	4.0	6.6	10.6	15.8	18.5	21.8	23.8	31.7
SP-0804	2"	1	0.75	H (ft)	125	105	105	102	102	98	82	72	39
SP-0805	2"	1.5	1	H (ft)	164	138	138	135	128	125	112	89	72
SP-0807	2"	2	1.5	H (ft)	197	177	177	174	171	167	144	128	105
SP-0809	2"	3	2	H (ft)	253	226	223	217	210	203	187	161	138
SP-0821	2"	7.5	5.5	H (ft)	699	541	535	528	515	502	453	397	354
SP-0825	2"	7.5	5.5	H (ft)	837	640	630	620	600	591	535	466	407


PERFORMANCE

SP4 LINE 4" STAINLESS STEEL DEEP WELL

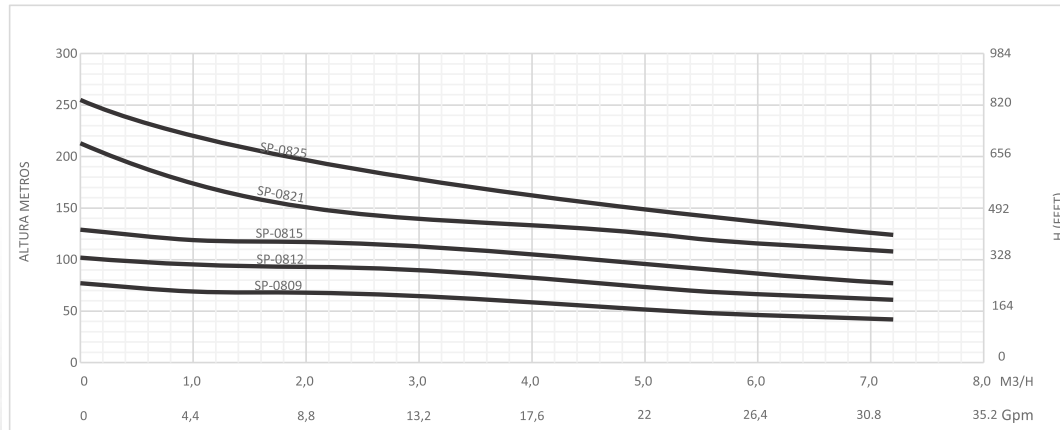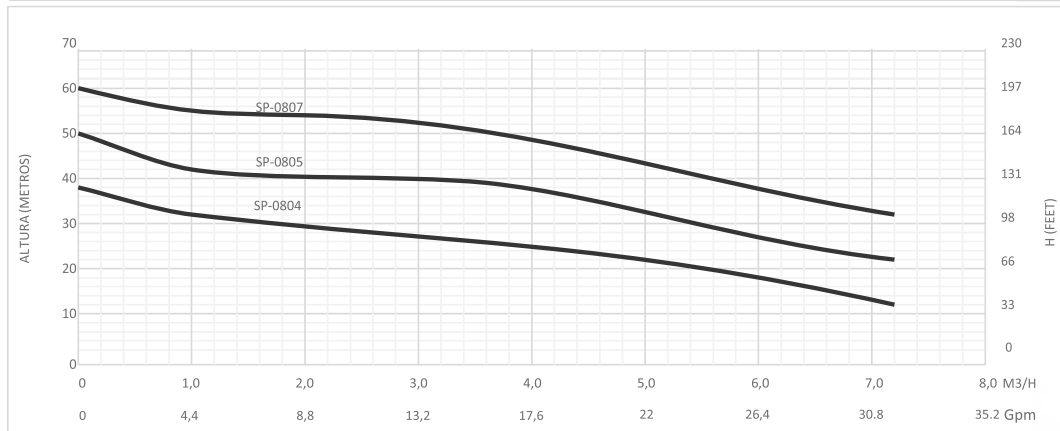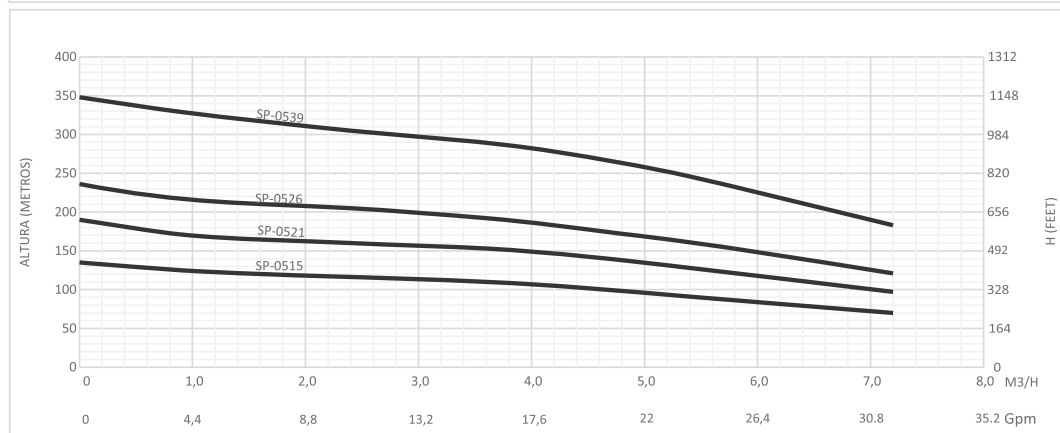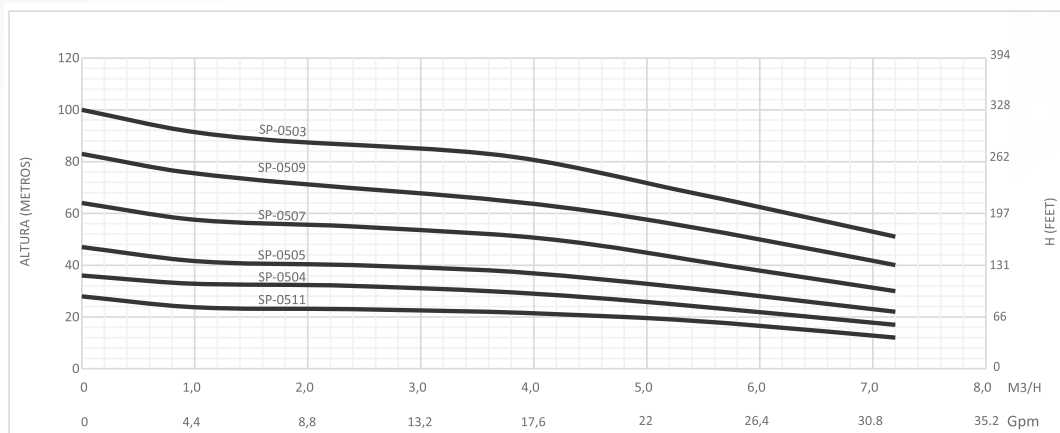

TECHNICAL DATA

SP4 LINE 4" STAINLESS STEEL DEEP WELL

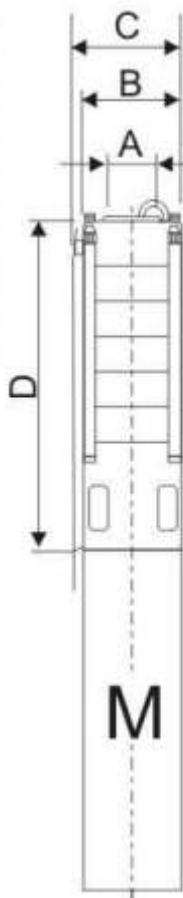

MODEL	A	B	C	D	MOTOR (M)
SP-0503	1 1/4"	3.4"	3.9"	9"	13"
SP-0504	1 1/4"	3.4"	3.9"	9.9"	13"
SP-0505	1 1/4"	3.4"	3.9"	10.7"	13.5"
SP-0507	1 1/4"	3.4"	3.9"	12.4"	14.8"
SP-0509	1 1/4"	3.4"	3.9"	14"	16.1"
SP-0511	1 1/4"	3.4"	3.9"	15.7"	16.9"
SP-0515	1 1/4"	3.4"	3.9"	19"	20"
SP-0521	1 1/4"	3.4"	3.9"	23.9"	21.7"
SP-0526	1 1/4"	3.4"	3.9"	28"	27.5"
SP-0539	1 1/4"	3.4"	3.9"	40.2"	31"
SP-0804	2"	3.4"	3.7"	13.5"	14.8"
SP-0805	2"	3.4"	3.7"	15.2"	16.1"
SP-0807	2"	3.4"	3.7"	18.5"	16.9"
SP-0809	2"	3.4"	3.7"	21.8"	20"
SP-0812	2"	3.4"	3.7"	26.7"	21.7"
SP-0815	2"	3.4"	3.7"	31.7"	24.5"
SP-0821	2"	3.4"	3.7"	41.6"	31"
SP-0825	2"	3.4"	3.7"	48.2"	31"



CHARACTERISTICS

SP4 LINE
4" STAINLESS STEEL DEEP WELL

STAINLESS STEEL SS304
IMPELLER

HIGH PERFORMANCE
IMPELLER

STAINLESS
STEEL SS304
CHECK VALVE

COOPER WINDING

STAINLESS STEEL SS304 SHAFT

APPLICATIONS

SP4 LINE
4" STAINLESS STEEL DEEP WELL

